

DUROMAR[®]

POWER PLANT APPLICATIONS

Long-Term Corrosion, Erosion, and Chemical Protection for Thermal Power Plant Assets with Duromar[®] Glass Flake Epoxy Systems



2026

 **Arudra**
Coatings



Of all the challenges impacting a modern thermal power plant, corrosion, erosion, and chemical degradation remain among the most persistent and demanding for plant designers, operators, and maintenance teams. Thermal power environments expose equipment and structures to an aggressive combination of high-temperature fluids, abrasive ash and particulates, chemically treated water, dissolved gases, and fluctuating pH conditions, creating continuous attack on metal and concrete surfaces through corrosion, erosion, cavitation, and chemical breakdown.

From the early development of large-scale thermal power infrastructure, Duromar® has been actively involved in solving corrosion, erosion, and performance-related challenges across circulating water systems, condenser water boxes, cooling tower basins, ash handling systems, raw and DM water pipelines, sumps, and effluent treatment facilities.

Duromar® recognized early that effectively protecting thermal power assets requires 100% solids, high-performance multi-functional and novolac epoxy systems, specifically engineered to withstand aggressive water chemistries, high flow velocities, ash and slurry abrasion, chemical dosing environments, and continuous immersion service. These advanced systems deliver long-term durability, reduced maintenance, and enhanced reliability of critical infrastructure throughout thermal power plant operations.

Arudra Engineers Pvt Ltd - in technical collaboration with Duromar Inc (USA), is a licensed Manufacturer, Distributor & Applicator of Duromar® range of products.

Quality, Safety & Compliance





Power Plant Applications

- 1 Circulating and cooling water pipelines
- 2 Flue Gas Desulphurisation(FGD)
- 3 Chimney Stack
- 4 Pumps
- 5 Ash Handling Systems
- 6 Coal Mill Duct Work
- 7 Coal Bunkers
- 8 Storage Tanks
- 9 Flooring Systems

Stop the costly cycle of frequent repairs and premature equipment replacement in your thermal power plant. Duromar® protective coatings and linings deliver a permanent, high-performance solution for rehabilitating and extending the life of critical steel and concrete assets, engineered to withstand the harshest power plant operating conditions—including corrosion, erosion, abrasion, cavitation, and aggressive chemical exposure.

By selecting Duromar® specialized polymer systems, power plant operators can restore and protect circulating water pipelines, condenser water boxes, cooling tower structures, ash handling systems, sumps, and effluent treatment units, while creating a seamless, non-permeable protective barrier.

Circulating and cooling water pipelines

Circulating and cooling water pipelines are critical to thermal power plant operation, transporting large volumes of water between condensers, cooling towers, and auxiliary systems. Continuous exposure to high flow velocities, dissolved salts, suspended solids, biofouling, and chemical treatment additives causes corrosion, erosion, and internal fouling, leading to reduced flow efficiency and increased maintenance. Durable protective linings are essential to ensure long-term reliability and efficient plant performance.

Pipeline Internals

Complication:

Pipeline internals are continuously exposed to process fluids, suspended solids, and chemical additives, making them highly susceptible to corrosion, erosion, scaling, and fouling. Effective internal lining systems protect the pipe surface, maintain hydraulic efficiency, prevent under-deposit corrosion, and extend the service life of pipelines in demanding industrial environments.

Solution:

Rebuild pitted and eroded areas using Duromar® SAR, followed by Duromar® HPL-2510 to provide a seamless lining resistant to corrosion, erosion, scaling, and biofouling in high-flow cooling water service. Surface preparation includes degreasing and removal of deposits, followed by abrasive blasting to Sa 2.5.

Product Details:

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-2510

DUROMAR® HPL-2510 is a versatile, easy-to-apply 100% solids coating suitable for circulating water pipelines, sewage treatment systems, and process water tanks. It can be applied by brush, roller, or conventional spray.



External Pipeline Rehabilitation System

Complication:

External pipelines in power plants are continuously exposed to soil moisture, corrosive environments, UV radiation, temperature variations, and industrial pollutants. Over time, these conditions lead to coating breakdown, external corrosion, metal loss, and structural weakening, increasing the risk of leaks, unplanned shutdowns, and costly pipeline replacement.

Solution:

Restore corroded areas using Duromar® SAR, reinforce with Duromar® FineWrap, and protect with HPL-2510 for long-term external corrosion resistance. Prepare the surface by removing old coatings and rust, followed by abrasive blasting to Sa 2.5.

Product Details:

Duromar® FINEWRAP

Duromar® FineWrap is a fiber-reinforced composite wrapping system that strengthens, seals, and protects ageing pipelines and equipment, restoring integrity without shutdown or replacement.

Duromar® SAR

DUROMAR® SAR is a user-friendly, abrasion- and chemical-resistant rebuilding putty, heavily reinforced with aluminum oxide, designed to repair and rebuild worn pump casings, slurry tanks, weld seams, and damaged metal surfaces.

Duromar® HPL-2510

DUROMAR® HPL-2510 is a versatile, easy-to-apply 100% solids coating suitable for circulating water pipelines, sewage treatment systems, and process water tanks. It can be applied by brush, roller, or conventional spray.



Flue Gas Desulfurization (FGD)

Flue Gas Desulfurization (FGD) systems in thermal power plants operate under extremely aggressive conditions involving acidic environments, high moisture, chlorides, abrasive slurry, fly ash carryover, and temperature fluctuations. These conditions cause severe corrosion, erosion, scaling, and chemical attack on absorbers, ducts, tanks, and associated equipment, leading to coating failure, leaks, reduced SO₂ removal efficiency, increased maintenance, and unplanned plant outages.

FGD Absorber

Complication:

FGD absorbers are critical pollution control units in thermal power plants, removing sulfur dioxide from flue gases. Continuous exposure to acidic environments, abrasive slurry, chlorides, high moisture, and elevated temperatures subjects internal surfaces to severe corrosion, erosion, and chemical attack, making robust protective linings essential for reliable operation and long-term asset integrity.

Solution:

Rebuild worn areas using Duromar® SAR and protect with HPL-2131 and/or EXP for high-build resistance to severe chemical and temperature exposure in FGD service. Prepare the surface by removing deposits and abrasive blasting to Sa 2.5.

Product Details:

Duromar® EXP

DUROMAR® EXP is a higher chemical and temperature resistant version of the EAC used in the most aggressive of chemical environments. It's used to resurface heat exchangers, valves, or pump internals.


Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-2131

Duromar® HPL-2131 is a trowellable material, which is designed to rebuild and/or protect tanks subject to severe erosion and corrosion. It is best applied using a mastic or grout pump.

- High-build material designed to rebuild and/or protect tanks subject to severe erosion and corrosion.
- Can be easily be applied to a thickness of up to 250 mils in a single coat.
- Used extensively within wet and dry FGD systems.

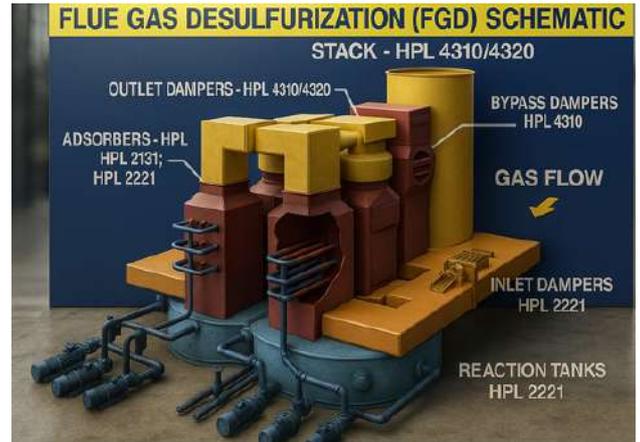

FGD Absorber-Outlet Duct / Bypass duct

Complications

FGD absorber outlet ducts and bypass ducts are critical flue gas handling components in thermal power plants, operating under high moisture, acidic condensates, chlorides, fly ash carryover, and temperature fluctuations. These severe conditions lead to corrosion, erosion, and coating failure, making durable, chemically resistant lining systems essential for safe operation and long-term reliability.

Solution:

Apply Duromar® HPL-4320 (novolac) to protect against acidic condensates, chlorides, fly ash, and temperature variations in duct areas. Prepare the surface by abrasive blasting to Sa 2.5.

Product Details:

Duromar® HPL-4320

DUROMAR® HPL-4320 is a high functionality, 100% solids novolac material, designed for concentrated sulfuric acid and other inorganic acid service. It can be applied by hand, but it is most efficiently applied over large areas by plural component airless. Requires elevated temperature cure. Used on high temperature process equipment, electrostatic precipitators and mineral acid storage tanks



Dry FGD-Bag Houses/Bag Filters

Complications

Dry FGD bag houses and bag filters in thermal power plants operate under continuous exposure to acidic dust, fine abrasive particulates, temperature fluctuations, and corrosive condensates. These harsh conditions lead to corrosion, erosion, dust build-up, and coating failure on internal steel surfaces and casings, resulting in reduced filtration efficiency, increased maintenance, and unplanned operational disruptions.

Solution:

Apply Duromar® HPL-2221 to provide flexible protection against abrasion and impact under acidic dust and fine particulate exposure. Prepare the surface by dry cleaning and abrasive blasting to Sa 2.5.

Product Detail:

Duromar® HPL-2221

DUROMAR® HPL-2221 is a medium viscosity product with outstanding abrasion resistance, impact resistance, and flexibility. It can be used for rail cars, ash hoppers, slurry tanks, secondary containment, traveling water screens, or anywhere requiring flexibility, abrasion and chemical resistance. It is designed to be applied by hand or with plural component spray equipment.



Chimney Stack

Complications

Chimney stacks are vital exhaust structures in thermal power plants, responsible for safely discharging flue gases to the atmosphere. Continuous exposure to hot gases, acidic condensates, moisture, fly ash residues, and cyclic temperature variations subjects internal and external surfaces to severe corrosion, chemical attack, and thermal degradation, making durable protective lining and coating systems essential for safe operation and long-term structural integrity.

Solution

Repair damaged areas using Duromar® SAR, resurface with EAC, and apply HPL-4323 for chemical resistance and thermal shock protection in stack service. Prepare the surface by removing deposits and condensate residues, followed by abrasive blasting to Sa 2.5.

Product Details:

Duromar® EAC


DUROMAR® EAC is a brush-applied maintenance material offering excellent resistance to acids, caustics, and abrasion, ideal for resurfacing tanks, heat exchangers, and pump or valve components.

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-4323

DUROMAR® HPL-4323 is a flexible version of the HPL-4320 used for secondary containment, ductwork, process vessels or anywhere requiring better flexibility with extremely good chemical resistance. It also has good resistance to thermal shock.

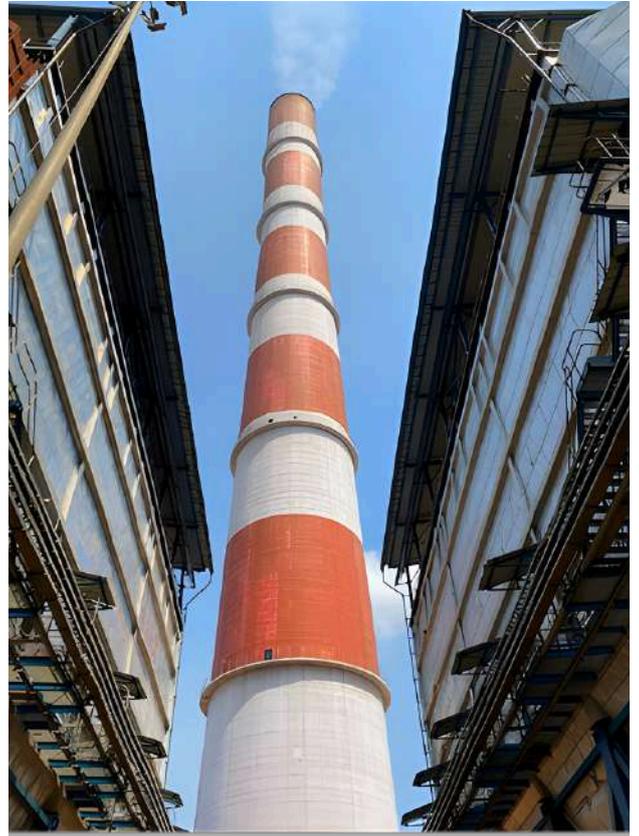

Pumps

Pumps are vital components in thermal power plants, responsible for circulating water, slurry, fuel, and process fluids across critical systems such as boiler feed, circulating water, ash handling, cooling water, and chemical dosing. Operating under high pressures, varying temperatures, abrasive solids, and chemically aggressive environments, pumps are continuously subjected to corrosion, erosion, abrasion, and cavitation.

Cooling Water Pumps

Complications

Cooling water pumps in thermal power plants operate continuously under high flow velocities, turbulence, dissolved salts, suspended solids, and variable water quality. These conditions lead to corrosion, erosion, cavitation, and loss of hydraulic efficiency in pump casings and internals, resulting in frequent maintenance, reduced performance, and unplanned outages.

Solution:

Rebuild worn areas using Duromar® SAR and apply EAC-LV to protect against corrosion, erosion, and cavitation while improving hydraulic efficiency. Prepare the surface by degreasing and abrasive blasting to Sa 2.5.


Product Details:

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® EAC-LV

DUROMAR EAC-LV is a brushable version of EAC used to provide a smooth final surface while enhancing fluid for resisting cavitation. EAC -LV should be used anywhere a smooth, abrasion, and impact resistant coating system is required.

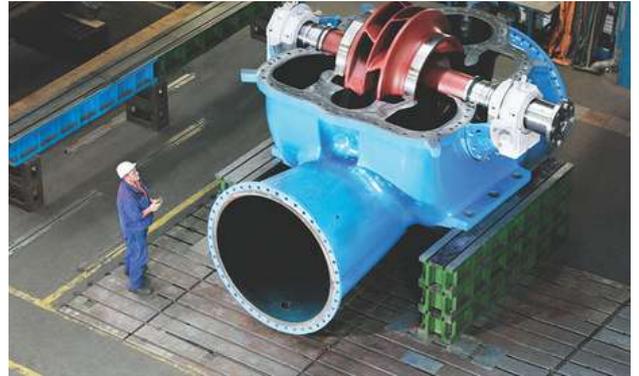

Slurry Pumps

Complications

Slurry pumps play a vital role in thermal power plants by transporting highly abrasive mixtures of ash, limestone, and water. Operating under conditions of high solids concentration, turbulent flow, and chemically aggressive media, these pumps experience intense abrasion, erosion, and corrosion of internal components, making robust protective linings critical for dependable performance and long service life.

Solution:

Protect against severe abrasion using Duromar® HAR and resurface with Duromar® EAC for corrosion and chemical resistance in ash or slurry service. Prepare the surface by degreasing and grit blasting to Sa 2.5.

Product Details:

Duromar® HAR

DUROMAR® HAR is a carbide-filled trowelable wear-resistant putty. It is a more abrasion-resistant product than SAR, with similar working characteristics. It is used primarily in areas requiring more resistance to fine slurries either in liquid or powder form.

Duromar® EAC

DUROMAR® EAC is a brush-applied maintenance material offering excellent resistance to acids, caustics, and abrasion, ideal for resurfacing tanks, heat exchangers, and pump or valve components.



Ash Handling Systems

Complications

Ash handling systems are essential in thermal power plants for collecting, conveying, and disposing of fly ash and bottom ash. Continuous exposure to abrasive ash particles, high-velocity flow, moisture, and chemically aggressive conditions leads to severe erosion, abrasion, and corrosion of equipment and pipelines, making durable protective linings critical for reliable operation and reduced maintenance.

Solution:

Apply Duromar® HAR for high wear resistance against abrasive ash flow and use HPL-4323 AR for additional abrasion and thermal shock protection. Prepare the surface by removing ash deposits and abrasive blasting to Sa 2.5.

Product Details:

Duromar® HAR

DUROMAR® HAR is a carbide-filled trowelable wear-resistant putty. It is a more abrasion-resistant product than SAR, with similar working characteristics. It is used primarily in areas requiring more resistance to fine slurries either in liquid or powder form.

Duromar® HPL-4323 AR

DUROMAR® HPL-4323-AR is a highly abrasion resistant version of the HPL-4323 used for spray dryer absorbers and FGD ductwork. Excellent resistance to thermal shock and abrasion.



Coal Mill Duct

Complications

Coal mill duct is a critical part of thermal power plants, conveying pulverized coal-air mixtures between mills, classifiers, and boilers. Continuous exposure to high-velocity flow, fine abrasive coal dust, elevated temperatures, and pressure fluctuations subjects duct interiors to severe erosion, abrasion, and wear, making durable protective linings essential for safe, efficient, and reliable operation.

Solution:

Apply Duromar® HAR and EAC for erosion and abrasion protection, and install Duromar® DuroTile set in HAR for severe wear areas. Prepare the surface by abrasive blasting to Sa 2.5.

Product Details:

Duromar® EAC


DUROMAR® EAC is a brush-applied maintenance material offering excellent resistance to acids, caustics, and abrasion, ideal for resurfacing tanks, heat exchangers, and pump or valve components.

Duromar® HAR

DUROMAR® HAR is a carbide-filled trowelable wear-resistant putty. It is a more abrasion-resistant product than SAR, with similar working characteristics. It is used primarily in areas requiring more resistance to fine slurries either in liquid or powder form.

Duromar® DuroTile

Duromar® DuroTile is a high-performance, hexagonal, >90% aluminum oxide ceramic tile lining system designed to protect industrial equipment from extreme abrasion, erosion, and impact. Supplied in sheets and embedded using Duromar® HAR epoxy, it provides a durable, long-lasting barrier for severe environments like coal mills, chutes, and hoppers.

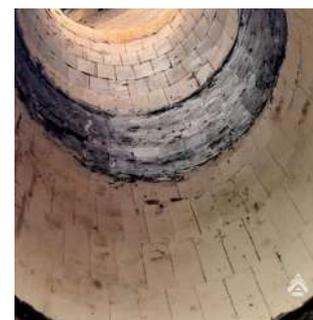

Coal Bunkers

Complications

Coal bunkers in thermal power plants are continuously exposed to abrasive coal particles, dust, moisture ingress, and corrosive condensates. These conditions cause severe abrasion, corrosion, material build-up, and flow blockages, leading to restricted coal flow, increased maintenance, safety risks, and unplanned operational disruptions.

Solution:

Rebuild and smooth surfaces using Duromar® SAR and EAC, followed by HPL-2221 to provide abrasion and impact resistance while improving material flow. Prepare the surface by removing coal deposits and contaminants, then abrasive blast to Sa 2.5.

Product Details:

Duromar® EAC

DUROMAR® EAC is a brush-applied maintenance material offering excellent resistance to acids, caustics, and abrasion, ideal for resurfacing tanks, heat exchangers, and pump or valve components.

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-2221

DUROMAR® HPL-2221 is a medium-viscosity coating offering excellent abrasion, impact, and chemical resistance with flexibility, suitable for rail cars, slurry tanks, and secondary containment, and applied by hand or plural-component spray.



Storage Tanks

Storage tanks in thermal power plants—including slurry tanks, DM water tanks, and chemical storage tanks—operate under highly demanding conditions. Slurry tanks face abrasive solids and continuous agitation, DM water tanks are prone to aggressive internal corrosion due to low conductivity and dissolved oxygen, and chemical storage tanks are exposed to highly corrosive acids, alkalis, and fumes. Together, these conditions result in corrosion, erosion, coating failure, leakage, and structural degradation, leading to increased maintenance, safety risks, environmental concerns, and unplanned plant downtime.

Slurry Tanks

Complications

Slurry tanks in thermal power plants handle highly abrasive mixtures of ash, limestone, and water under continuous agitation and wet service. The combination of high solids concentration, turbulent flow, and chemically aggressive media leads to severe erosion, abrasion, and corrosion of tank surfaces, resulting in coating failure, leakage risks, increased maintenance, and reduced service life.

Solution

Apply Duromar® HPL-2131 or HPL-2132 to provide high-build protection against abrasion, erosion, and wet-service corrosion. Prepare the surface by desludging and degreasing, followed by abrasive blasting to Sa 2.5.

Product Details:

Duromar® HPL-2131

Duromar® HPL-2131 is a trowellable material, which is designed to rebuild and/or protect tanks subject to severe erosion and corrosion. It is best applied using a mastic or grout pump.

- High-build material designed to rebuild and/or protect tanks subject to severe erosion and corrosion
- Can be easily be applied to a thickness of up to 250 mils in a single coat
- Used extensively within wet and dry FGD systems

Duromar® HPL-2132

DUROMAR® HPL-2132 is a highly filled, trowellable, 100% solids lining system with excellent chemical resistance. This highly filled coating system can be applied up to a thickness of 250 mils in a single coat. The combination of high film build and specially engineered ceramic fillers provide long term protection against even the harshest abrasion and prevent water from permeating through the coating.



DM Water Tank

Complications

DM water tanks in thermal power plants store high-purity water that is inherently corrosive to carbon steel due to low conductivity and dissolved oxygen. Continuous storage under wet conditions accelerates internal corrosion and coating breakdown, risking contamination of boiler feedwater, leakage, increased maintenance, and reduced tank service life.



Solution

Rebuild damaged areas using Duromar® SAR and coat with HPL-4310 (novolac) for corrosion protection in DM water service. Prepare the surface by degreasing and abrasive blasting to Sa 2.5.

Product Details:

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-4310

DUROMAR® HPL-4310 is a high functionality, 100% solids novolac material, which can be applied by conventional airless spray equipment. It can be used in power plant outlet ducts, utility systems, petrochemical and acid storage tanks, or anywhere requiring outstanding chemical resistance in an easy to apply coating system.



Acid/Chemical Storage Tank

Complications

Acid and chemical storage tanks in thermal power plants are continuously exposed to highly corrosive acids, alkalis, fumes, and spill conditions. These aggressive environments cause rapid chemical attack, corrosion, coating failure, and material degradation, increasing the risk of leaks, safety hazards, environmental non-compliance, and unplanned operational downtime.

Solution:

Rebuild damaged areas using Duromar® SAR and line with HPL-4320 to provide strong chemical resistance against acids, alkalis, and vapors. Prepare the surface by degreasing and removing residues, followed by abrasive blasting to Sa 2.5.


Product Details:

Duromar® SAR

DUROMAR® SAR is an easy-to-use rebuilding putty with excellent abrasion and chemical resistance, heavily filled with aluminum oxide and suitable for restoring pump casings, slurry tanks, weld seams, and worn metal components.

Duromar® HPL-4320

DUROMAR® HPL-4320 is a high functionality, 100% solids novolac material, designed for concentrated sulfuric acid and other inorganic acid service. It can be applied by hand, but it is most efficiently applied over large areas by plural component airless.

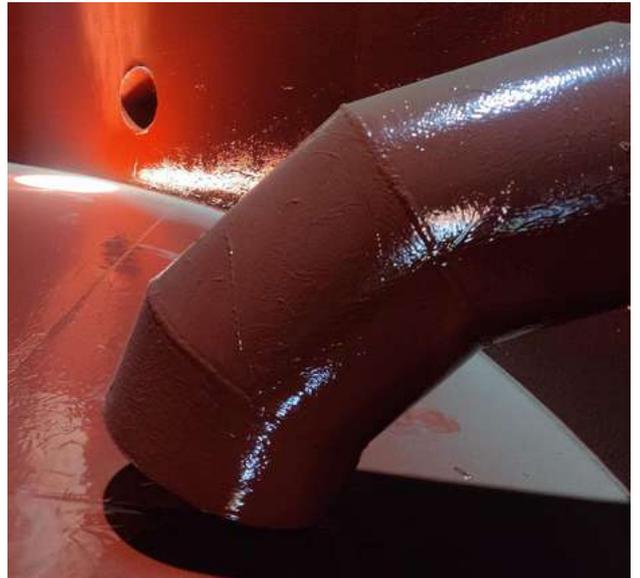

Flooring Systems

Flooring systems in thermal power plants are exposed to chemical spills, oil leakage, water ingress, heavy mechanical loads, vibration, and continuous foot and equipment traffic. These harsh conditions lead to surface wear, cracking, loss of adhesion, corrosion of embedded steel, and safety hazards, increasing maintenance demands, operational risks, and the likelihood of unplanned downtime.

Secondary Containment Zone

Complications

Secondary containment zones are critical safety areas in power plants, designed to contain leaks or spills from tanks, pipelines, and chemical storage systems. Continuous exposure to chemicals, moisture, weathering, and occasional spill events subjects containment surfaces to chemical attack, corrosion, and concrete degradation, making durable, impermeable protective linings essential for environmental protection and regulatory compliance.

Solution:

Seal the surface with DF-1301, rebuild damaged areas using DUROFIL, and apply DF-4301 (novolac) for chemical-resistant, spill-proof containment protection. Prepare the surface by removing contaminants and grinding or shot blasting to CSP 3-5.

Product Details:

Duromar® DF-1301

DUROMAR® DF-1301 is a clear, 100% solids concrete sealer with a long working time. It is used primarily to seal the concrete prior to the application of additional topcoats and to restore the mechanical properties of old concrete. It can be cured at temperatures as low as 40° F and can be applied to damp concrete.

Duromar® DUROFIL

DUROMAR® DUROFIL is a 100% solids epoxy grout and rebuilding compound for repairing chemically damaged concrete floors and secondary containment areas. It provides a strong base for DUROFLOR® systems where improved acid resistance or a smoother finish is required.

Duromar® DF-4301

DUROMAR® DF-4301 is a 100% solids, novolac floor coating with outstanding chemical resistance to acids, bases and solvents. It can be applied by brush, roller, or plural component spray equipment. It is best used in secondary containment areas and floors subject to chemical splashes and spills.



Turbine Flooring

Complications

Turbine flooring in power plants is subjected to continuous exposure to oil spills, water ingress, vibration, mechanical loads, and chemical contaminants. These conditions lead to surface degradation, corrosion of embedded steel, and safety hazards, making durable, slip-resistant, and chemically resistant flooring systems essential for safe operation and long-term performance.

Solution:

Seal the surface with DF-1301, repair using DUROFIL, and apply DF-1310 to provide a durable, slip-resistant floor with resistance to water and mild chemicals. Prepare the surface by degreasing and removing laitance, followed by grinding or shot blasting to CSP 3-5.

Product Details:

Duromar® DF-1301


DUROMAR DF-1301 is a clear, 100% solids concrete sealer with a long working time. It is used primarily to seal the concrete prior to the application of additional topcoats and to restore the mechanical properties of old concrete. It can be cured at temperatures as low as 40° F and can be applied to damp concrete.

Duromar® DUROFIL

DUROMAR® DUROFIL is a specially formulated 100% solids epoxy grout and rebuilding product for filling holes and rebuilding severely chemically attacked concrete floors and secondary containment areas. DUROFIL provides an excellent base for other DUROFLOR® products, such as CHEMCRETE, DF-4301, etc., where more acid resistance or a smoother finish is required.

Duromar® DF-1310

DUROMAR® DF-1310 is a general-purpose epoxy floor coating with good low-temperature curing, flexibility, impact resistance, and strong adhesion to damp concrete. It offers good resistance to water, seawater, de-mineralized water, and dilute inorganic acids, but is not recommended for strong acids or solvents.

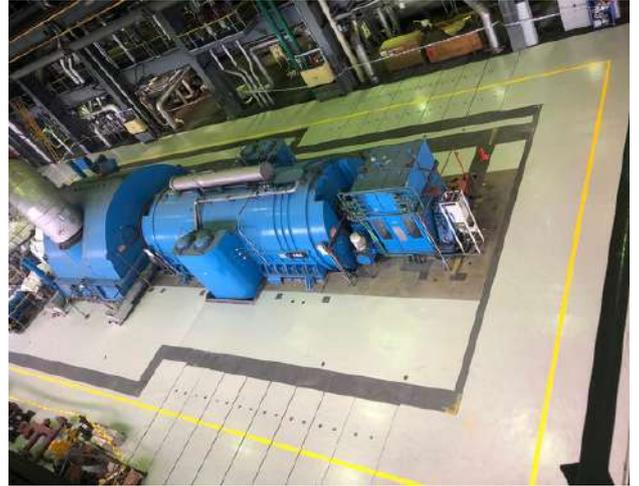


Application	Resurface	Rebuild	Lining
Pipeline Internals	-	SAR	HPL-2510
External Pipeline Rehabilitation System	FINEWRAP	SAR	HPL-2510
FGD Absorber	EXP	SAR	HPL-2131
FGD Absorber-Outlet Duct / Bypass duct	-	-	HPL-4320
Dry FGD-Bag Houses/Bag Filters	-	-	HPL-2221
Chimney Stack	EAC	SAR	HPL-4323
Cooling Water Pumps	EAC-LV	SAR	-
Slurry Pumps	EAC	HAR	-
Ash Handling Systems	-	SAR	HPL-4323 AR
Coal Mill Duct	DuroTile	HAR	EAC
Coal Bunkers	EAC	SAR	HPL-2221
Slurry Tank	-	HPL-2131	HPL-2132
DM Water Tank	-	SAR	HPL-4310
Acid/Chemical storage Tanks	-	SAR	HPL-4320
Secondary Containment Zone	DF-1301	DUROFIL	DF-4301
Turbine Flooring	DF-1301	DUROFIL	DF-1310

DUROMAR® PRODUCTS KEY FEATURES



Superior Corrosion Resistance



Exceptional Erosion & Abrasion Protection



High Chemical & pH Tolerance



Cavitation Damage Resistance



Thermal Stability & Cycling Resistance



Seamless, Non-Permeable Protection



Extended Asset Life & Reduced Maintenance



Strong Adhesion to Steel & Concrete



Arudra

Coatings



Arudra
Engineers Private Limited



www.arudra.co.in
www.duomar.com



coatings@arudra.co



Arudra Engineers Pvt Ltd
- Industrial Coatings



Arudra Engineers Pvt Ltd
- Industrial Coatings



Arudra Engineers Pvt Ltd
No: 79, Valmiki Street, Thiruvanimiyur,
Chennai – 600041.



044-24901623
044-24424755



Arudra Maintenance & supplies. Inc
Unit 1814, Cityland Condominium 10 Tower 1, 156
HV Dela Costa St, Cor. Ayala Ave, Makati City,
Philippines



SCAN ME